


LIGHTOLIER® Performance Recessed CFL Downlighting 1001FDIC

Page 1 of 1

5" Aperture, 1 Light, Compact Fluorescent, IC AirSeal®, Dimming, Frame-In Kit

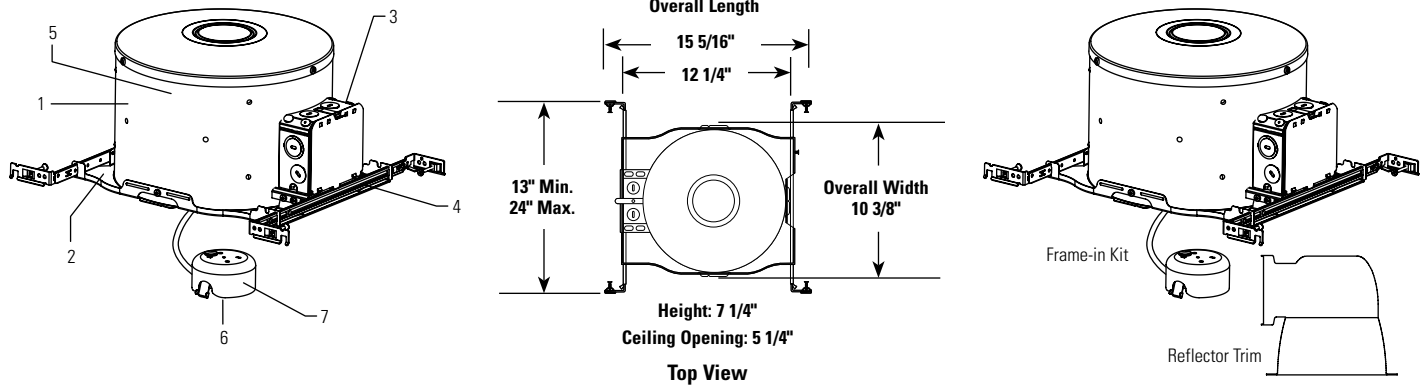

Complete Fixture consists of Frame-In Kit and Reflector Trim. Select each separately.

Uniframe™ Frame-In Kit	Uniframe™ Compact Fluorescent Performance Series Reflector Trims					
	Horizontal Open	Horizontal Wall Wash - Single	Horizontal Wet Location Lensed / Diffused		Horizontal Cross Blade	
	1001FDICMX1** (Advance Mark10 – 120v) 26w Triple GX24q-3 Base 120v – 0.26amp max 1001FDICMX2** (Advance Mark10 – 277v) 26w Triple GX24q-3 Base 277v – 0.11amp max	1001HCL 1001HCD 1001HWH	1001HCLSW 1001HCDSW 1001HWHSW	Clear Lens 1001HCLC 1001HCDC 1001HWHC Opal Lens 1001HCLCLO 1001HCDCLO 1001HWHCLO	Fresnel 1001HCLCF 1001HCDCF 1001HWHCF	1001HACB 1001HWHCB
Universal Series Reflector Trims (Reference Trim Spec Sheet for Recommended Lamping)						
Cone		Satin Cone	Baffle	Wall Wash	Wet Location	
1012*	1071	1008*	1005*	1035	1024	
1013*	1045	1010*	1005BNM	1035WH	1078	
1013BK*	1046		1005WH	1085		
1013WH	1046CD		1076	1095		
1013CD*			1076WH	1096		
				1096CD		

**Add N to catalog number for preset nails.

*Add NM suffix to catalog number for Natural Metal flange and finish.

Features

- Housing:** .028" (#21ga.) aluminum. UL listed for direct contact with thermal insulation. AirSeal® housing minimizes air leakage to less than 2 CFM at 1.57 PSF (or 75pa), which complies with Model Energy Code (Section 602.3.3) and Washington State Energy Code (Section 502.4) and reduces heat loss and condensation in ceiling. Access door for inspection of junction box.
- Mounting Frame:** .032 (#22 ga.) galvanized steel. Accommodates ceilings up to 1 1/2" thick. 3/8" deep integral lip. Locks into position along length of mounting bars with locking screw and bendable slot. Four slots are positioned 90° apart to simplify alignment. Push-in/twist-out roto-clips hold reflector flush to ceiling.
- Junction Box:** 2" X 4" X 3 1/2" (22 cu. in.) .032" (#22 ga.) galvanized steel. UL listed for maximum of 8 (#12 ga.) 90°C through branch circuit conductors.
- Mounting Bars:** .059" (#16 ga.) galvanized steel. Bars pivot for easy attachment and wire-in below ceiling line. Bars extend to accommodate 16" to 24" O.C. joist spacing. Bars can accommodate 12" O.C joist spacing after a slight field modification (see Instruction Sheet). Features integral self tapping phillips screws for secure attachment to wood or metal construction. Attaches to T-bar ceilings without the need of accessories.
- Ballast:** Mounted inside housing. 120V or 277V UL Listed Electronic Dimming Ballast, end of lamp life protection, class "P" thermally protected, class "A" sound rating.
- Socket:** Four-pin base, molded thermoplastic socket, prewired with No. 18 AWM leads to ballast.
- Socket Housing:** .036" (#20ga.) Galvanized Steel housing attaches to reflector trim by spring clip for precise optic alignment.

Options & Accessories

Extra-Thick Ceiling

Mounting Ring: 1967B - 1 1/4" to 2" thick ceilings

Labels

cULus Listed (Type I.C., Suitable for Damp Location), I.B.E.W.

Complies with Air Leakage Requirements stated in the Model Energy Code and the Washington State Energy Code.

AirSeal® is a registered trademark of Lightolier

Job Information	Type:
Job Name:	
Cat. No.:	
Lamp(s):	
Notes:	

631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710
We reserve the right to change details of design, materials and finish.
www.lightolier.com © 2008 Philips Group • D0708